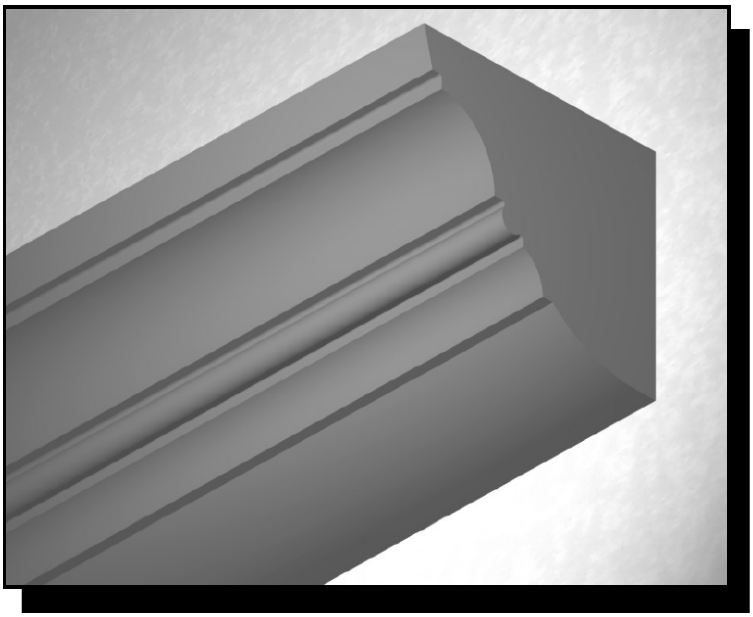

ACV

JOB NAME

FIXTURE TYPE

ACV SELF CONTAINED COVE LUMINAIRE

FEATURES

- Available in nominal lengths up to 8’-0” sections or continuous rows, T-5 or T-8 operation.
- Glare-free indirect illumination is ideal for hallways and small offices.
- Modern appearance perimeter cove fixture resembles decorative molding.
- Inside and outside 90 degree turns are available creating smooth transitions at corners.
- Eliminates the cost and construction associated with conventional drywall cove systems.
- Dimming is available as an option, allowing the end user to fully control light levels throughout the day and night.

SPECIFICATIONS

HOUSING
Housing constructed of durable extruded aluminum. Welded aluminum decorative end caps at ends of rows.

ELECTRICAL
All T5 and T8 fixtures are standard with high efficiency electronic ballasts.

SHIELDING
Open top and solid fixture body for uniform indirect light output.

FINISH
Housings and ends are post-painted white as standard with smooth polyester powder coat. All custom colors and textures are available upon request.

CERTIFICATION
All units bear UL and Made in USA label.

RLE Industries • 35 Kulick Road • Fairfield, NJ 07004 • Phone: (973) 276-1444 • Fax (973) 276-1453

Robert Lighting and Energy
Architectural Series

ACV Luminaire

Ordering Matrix

Model	Lamps	Length	Lamp/Ballast	Shielding Direct / Indirect	Mounting	Voltage	Options
ACV	1 2	48” 96” XX	T5/EB T5HO/EB T8/EB	SO/OP	WM	120 277 UNV	EM DM CO

XX: Special Length

T5/EB: Elect. Ballast
T5HO: Elect. Ballast
T8/EB: Elect. Ballast

SO: Solid Housing
OP: Open Top

WM: Wall Mounted

EM: Emergency Backup
DM: Dimming
CO: Color other than white

Example: If you wanted to specify an ACV fixture with 2 lamp T8 electronic ballast, 120-277 Volt electronic ballast, 8’-0” in length, the model number would read as follows:
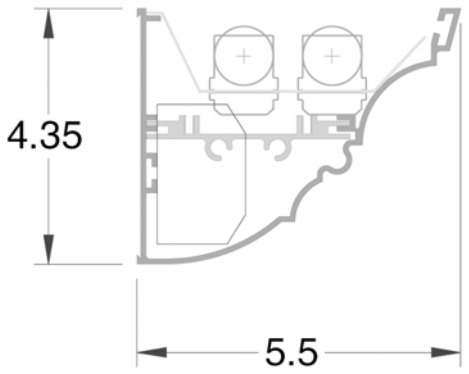
ACV – 2 – 96 – T8/EB – SO/OP – UNV