

MCG

JOB NAME:

FIXTURE TYPE:



SURFACE MOUNTED LINEAR DIRECT/INDIRECT LUMINAIRE

FEATURES

- Available in T8 and T5 lamping.
- Contemporary, low profile luminaire designed for surface or suspended mounting.
- Ideal for use in classrooms, conference room, reception areas, anywhere surface mounting is preferred and indirect illumination is desired.
- Highly reflective matte white finish provides soft, uniform indirect illumination.
- Round hole perforated center basket with reflective white acrylic diffuser controls glare and veiling reflection. Fixture is also available with fluted or smooth lens for added direct illumination.

SPECIFICATIONS


- **HOUSING**
Die formed heavy gauge steel unitized into one piece.
- **ELECTRICAL**
Electronic instant start solid-state ballasts with less than 10% THD, comply with Federal Energy Efficiency standards. Optional electronic dimming is also available.
- **SHIELDING**
Perforated diffusing element with matte white acrylic overlay or lensing as desired.
- **FINISH**
All metal parts pretreated with a phosphate bonding process and finished with an electrostatically applied high temperature baked matte enamel for superior reflectance and durability.
- **CERTIFICATION**
All units bear UL and Made in USA labels.



MCG Luminaire



Ordering Matrix

Model	Lamps	Length	Lamp/Ballast	Shielding	Mounting	Voltage	Options
MCG	1	48"	T8/EB	PF	AC	120	EM
	2	XX		AL	ST	277	HO
				OL	SF	DUAL	DM

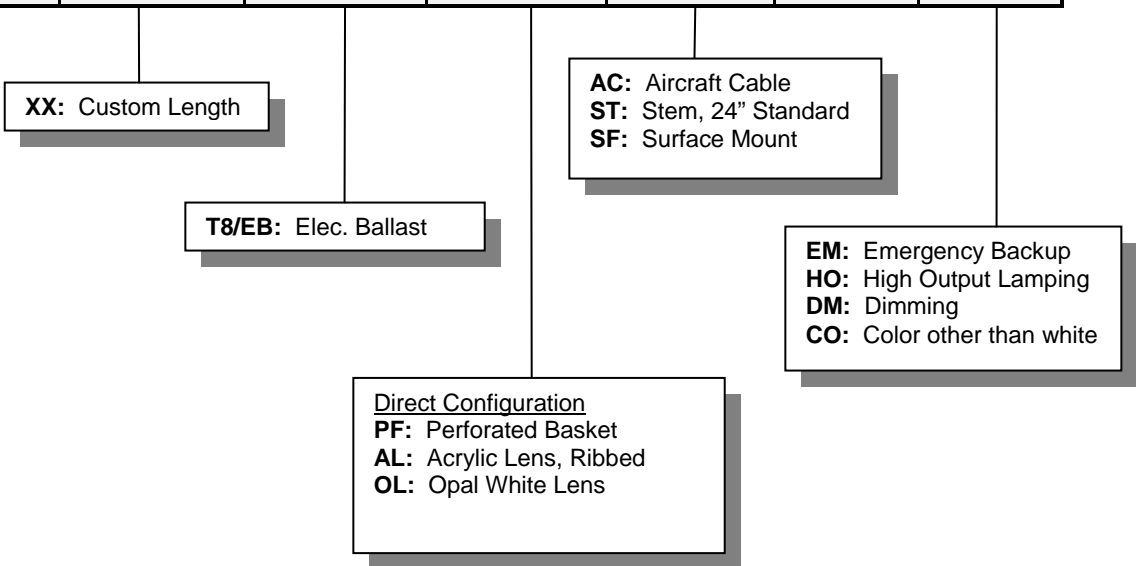

Example: If you wanted to specify a MCG fixture with 2 lamps, 8' – 0" in length, T8 electronic ballast with a ribbed acrylic lens, mounted on aircraft cable and 120 volt high output lamping the model number would read as follows:

MCG – 2 – 96 – T8/EB – AL – AC – 120 – HO

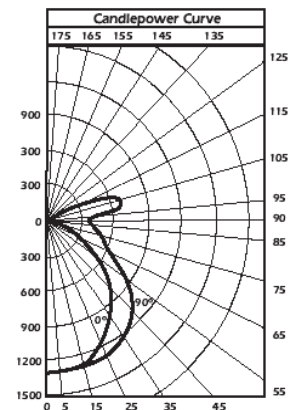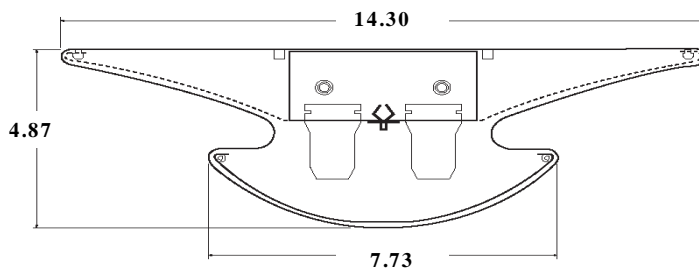

MCG-232T8-