



PERF4

JOB NAME

FIXTURE TYPE

STEEL LINEAR PERFORATED/ BAFFLE DIRECT/INDIRECT

FEATURES

- A low-profile suspended direct/indirect luminaire designed to provide attractive glare free ambient lighting.
- Available in 4' and 8' lengths.
- Available in 1, 2, and 3 lamp configurations in T8, T5 and T5-HO.
- Inconspicuous internal connectors allow for virtually seamless continuous row applications.
- Perforated sides with opal acrylic inlay in conjunction with the center micro-perforated baffle combine soft, glare-free direct and indirect illumination.
- Ideal for office, conference rooms, reception areas, classrooms, video display terminal work or any installation where linear luminaires are preferred.
- Contoured end plates for end of run.
- Fixtures can be cable or rigid stem mounted.

SPECIFICATIONS

- **HOUSING**
Die-formed 20 gauge cold rolled steel.
- **ELECTRICAL**
High Frequency Instant Start Electronic Ballasts are standard. Optional Rapid Start, Program Start and Electronic Dimming ballasts.
- **FINISH**
Powder coated with white enamel with minimum 87% reflectivity. Custom colors available.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels. Suitable for interior use.






Steel Linear Perforated/Baffle Direct/Indirect

Ordering Matrix

SERIES	# OF LAMPS	LAMP TYPE	LENGTH (ft)	VOLTAGE	MOUNTING	OPTIONS
PERF4	1, 2, 3	32T8	4 or 8	120	AC	EM
	1, 2, 3	28T5	4 or 8	277	ST	DIM
		54T5-HO	4 or 8			

AC: Aircraft Cable
ST: Stem Mounted

EM: Emergency Battery
DIM: Dimming Ballast

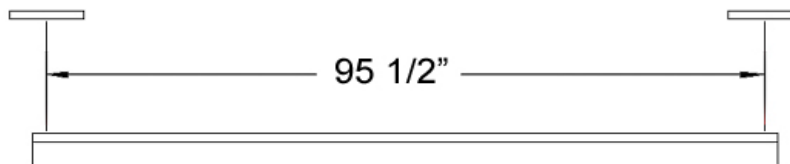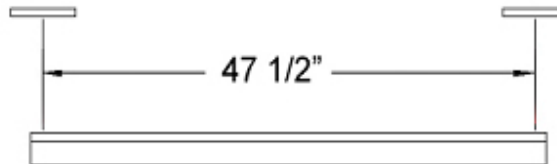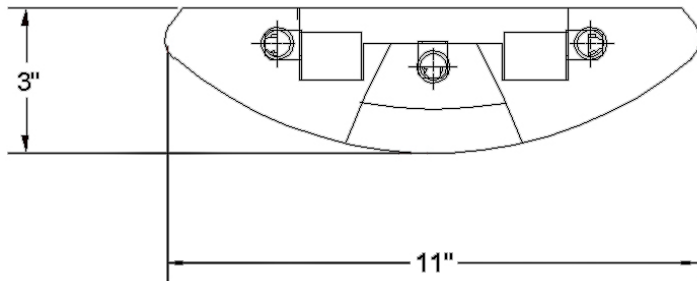

*For critical application verify all dimensions with factory.
 For additional Lamp/Ballast options, consult factory.*