


S44

JOB NAME:

FIXTURE TYPE:

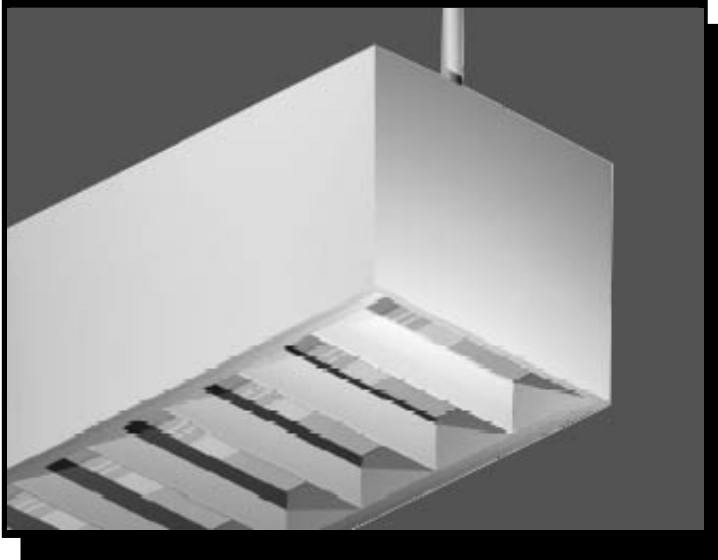

S44 Luminaire (Shown with white cross blade)

FEATURES

- Available in nominal lengths up to 8'-0" sections, T5 or T8 operation, custom lengths available upon request. For continuous runs please consult factory with specific wiring instructions.
- Surface, stem, or cable mount. Also available for grid mount (G44) and with integral 1/2" flange for gypsum ceilings (M44). Wall mount is also available.
- 4"x 4" narrow design is ideal for installation in corridors, lobbies, and office areas, where space is often limited.
- Optional asymmetrical distribution with integral reflector.
- Simple clean linear lines allow for this fixture to blend aesthetically into almost any space.
- Corner and angled intermediate couplings are available when fitting this fixture into a specific design scheme.

SPECIFICATIONS

- **HOUSING**
Die formed welded heavy gauge cold rolled steel.
- **ELECTRICAL**
Energy saving electronic ballasts comply with Federal Energy Efficiency standards.
- **DIFFUSERS**
Pattern A12 acrylic lens is standard. Optional cross blade finish same as fixture housing, unless requested otherwise.
- **FINISH**
All metal parts post painted with premium grade white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance. Custom colors are available upon request.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.




S44 Luminaire

Ordering Matrix

MODEL	LENGTH	LAMP	MODEL	LENGTH	LAMP
S44-132T8-4	48"	1-FO32T8	S44-132T8-8	96"	2-FO32T8
S44-128T5-4	48"	1-FO28T5	S44-128T5-8	96"	2-FO28T5
S44-154T5HO-4	48"	1-FO54T5HO	S44-154T5HO-8	96"	2-FO54T5HO

Options:

- Stem Mount – suffix ST (specify length)
- Aircraft Cable Mount – suffix AC (specify length)
- Wall Mount – suffix WL
- Cross Blade – suffix BL

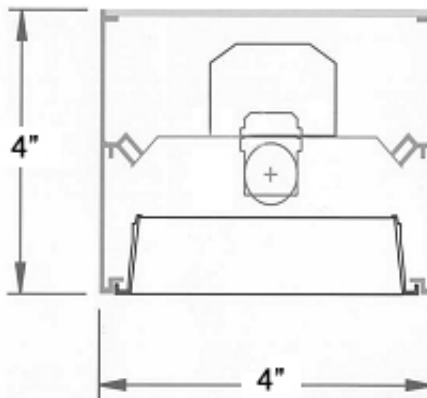

*For critical application, verify all dimensions with factory.
For additional Lamp/Ballast options, consult factory.*