

# AFLHB

JOB NAME:

FIXTURE TYPE:

## *FLUORESCENT HIGH BAY with uplight*

### FEATURES



- For energy efficient replacement of Metal Halide and High Pressure Sodium Fixtures
- Available in T-8, T-5, T-5 HO, 4 lamp and 6 lamp configurations.
- Side acrylic reflectors provide uplight and eliminate the “cavern” look for other fluorescent high bays.
- Ideal for factories and warehouses where high levels of illumination are required.
- Miro-4 reflector maximizes light output while offering high efficiency. White reflector also available for low bay applications.
- Pendant mounting (for chain or cable) standard. Optional quick connect hook with 24” cord and NEMA twist plug for chain hanging.
- Optional provisions for dimming/HI-LO controllable systems for additional energy savings.

### SPECIFICATIONS

- **HOUSING**  
Cold Rolled Steel body with injection molded ABS end caps. Finished in baked white enamel.
- **ELECTRICAL**  
High efficiency electronic ballasts available in either standard or high output wattages.
- **REFLECTOR**  
Miro-4 reflector designed specifically for lamp quantity chosen (4 or 6). White reflector also available.
- **CERTIFICATION**  
All units shall bear UL and Made in U.S.A. label.



# PHOTOMETRIC REPORT AND ORDERING INFORMATION

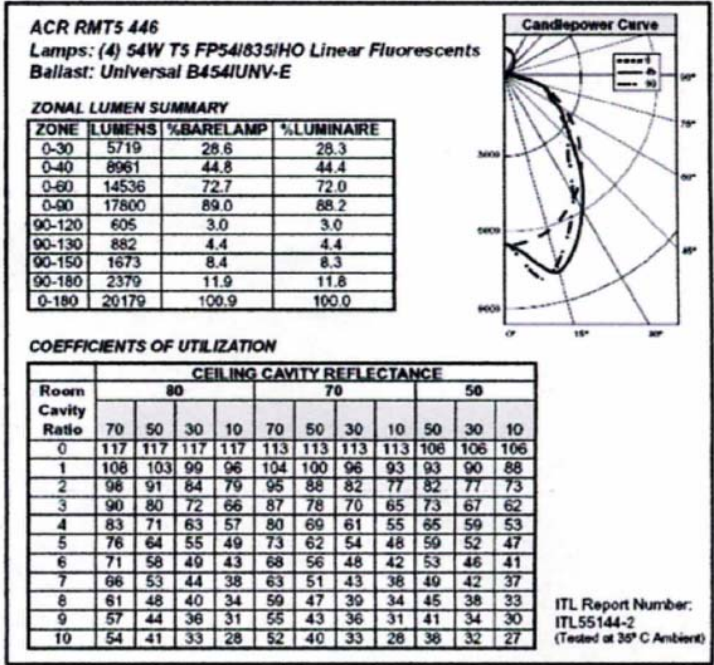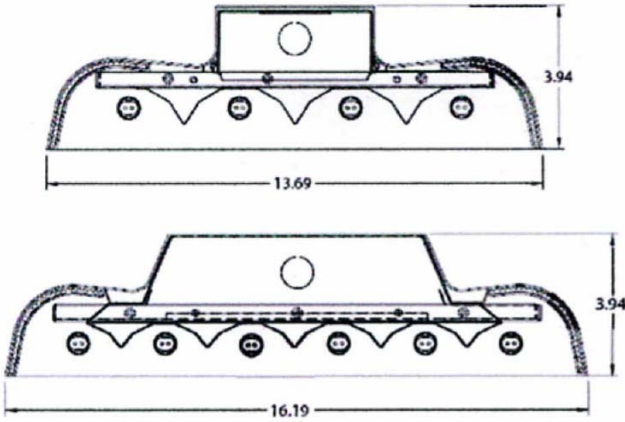

**Catalog Number**

- AFLHB – 4 – 28
- AFLHB – 6 – 28
- AFLHB – 4 – 54
- AFLHB – 6 – 54
- AFLHB – 4 – 32
- AFLHB – 6 – 32

**Lamps**

- (4) F28W/T5
- (6) F28W/T5
- (4) F54W/T5
- (6) F54W/T5
- (4) F32W/T8
- (6) F32W/T8

For critical applications, verify all dimensions with factory.  
 For additional Lamp/Ballast options, consult factory.

**Options:**

- Bi-level switching – suffix BL
- Emergency Battery Pack – suffix EB4-5HO
- Dimming ballast – suffix DM
- Wire Guard – suffix WG
- 1/8" Acrylic lens – suffix ALNS
- Additional anchor for seismic wiring – suffix SB
- Prismatic lens – suffix PLNS
- Twist Lock Cord & Plug– suffix CP (specify voltage)
- Safety Chain with V Hook – suffix SC
- Chain Kit – suffix CK