


HWP

JOB NAME:

FIXTURE TYPE:

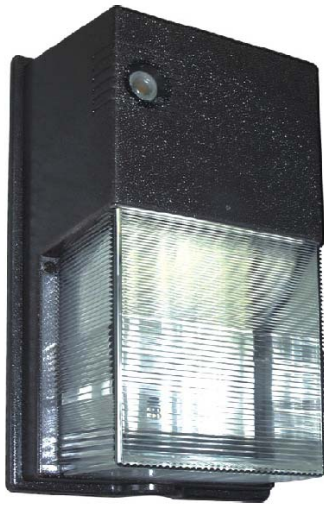

HORIZONTAL WALL PACK

FEATURES

- Die cast aluminum base plate with conduit access. Corrosion resistant housing.
- One piece anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency.
- Threaded apertures for conduit and optional photocell.
- Fully gasketed weather resistant construction.
- For wall mounting directly over standard 4" outlet box or with surface conduit.
- Optional tamperproof hardware.

SPECIFICATIONS

- **HOUSING**
High impact polycarbonate housing.
- **ELECTRICAL**
For metal halide lamping ballast is high power factor, constant wattage auto transformer. Electrical components are mounted to cast aluminum housing for optimum heat dissipation. For high-pressure sodium, ballast is normal power factor reactor type for 120V. High power factor, multi-tap, and most fixed voltages available.
- **SHIELDING**
High impact polycarbonate is standard.
- **FINISH**
Baked on premium architectural bronze for maximum durability.
- **CERTIFICATION**
All units bear UL label for wet location.



Horizontal Wall Pack

Ordering Matrix

Model	Wattage	Lamp	Voltage	Finish	Options
HWP	50	MH	120	BZ	PC
	70	HPS	277	CC	TP
			480		GLR
			MULTI		QZ
HWP-F	26	CP			EM
	42				

MH: Metal Halide
HPS: High Pressure Sodium
CP: Compact Fluorescent

BZ: Bronze Finish
CC: Custom Color

PC: Photocell
TP: Tamperproof hardware
GLR: Single Fuse
QZ: Quartz Restrike
EM: 90 Min. Remote Battery Back-Up

Example: If you wanted to specify a 26 watt, compact fluorescent HWP fixture with tamperproof hardware and a 90 minute remote battery back up with a bronze finish, the model number would read as follows:

HWP-F – 26 – TP – BZ – EM

