


CAW

JOB NAME:

FIXTURE TYPE:

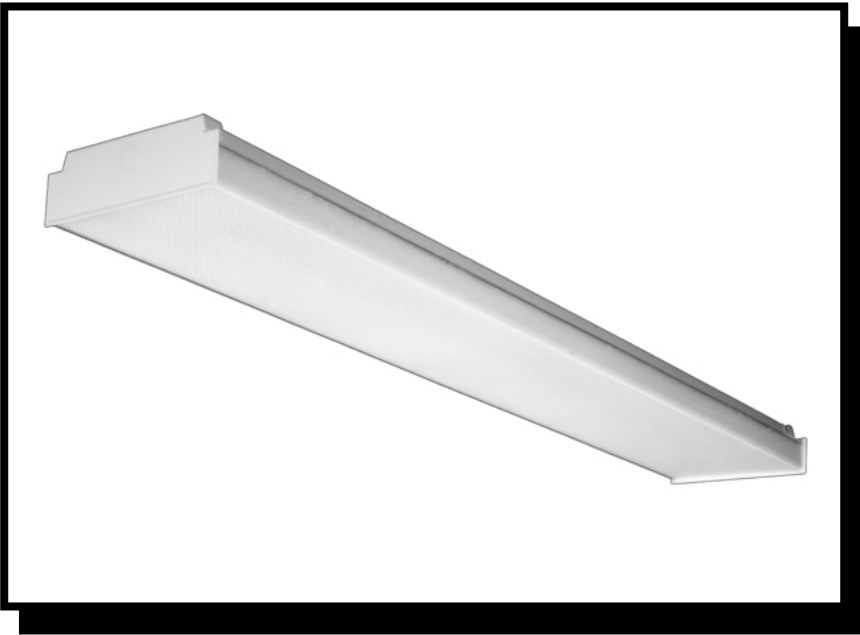

LOW PROFILE HIGH EFFICIENCY WRAPAROUND

FEATURES

- Available in 2' and 4' lengths.
- Unique body design produces a slender and low profile appearance.
- Suitable for most standard and low density ceiling applications.
- 100% clear acrylic prismatic diffuser hinges from either side for ease of service. Flat bottom and linear ribbed sides provide excellent light control.
- Integral embossed white end plates with flush knockouts make fixtures for individual or continuous row mounting.
- For pendant or surface mounting.
- Available with energy efficient reflectors in Specular Silver (95%) or Specular Aluminum (85%)

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel housing and ends unitized into one piece.
- **ELECTRICAL**
Electronic, HPF ballasts comply with Federal Energy Efficiency standards.
- **FINISH**
All parts finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.

LOW PROFILE HIGH EFFICIENCY WRAPAROUND

Ordering Matrix


MODEL	LAMPS	LENGTH	BALLASTS	VOLTAGE	OPTIONS
CAW	2	24" 48"	T8/EB T5/EB	120 277 UNV	SS95 SA85 EM

T8/EB: Electronic Ballast
T5/EB: Electronic Ballast

SS95: Specular Silver Reflector
SA85: Silver Aluminum Reflector
EM: Emergency Backup

Example: If you wanted to specify a CAW fixture, 4' feet in length with 2 T8 lamps and a Specular Silver Reflector, the model number would read as follows:

CAW-2-48-T8/EB-SS95

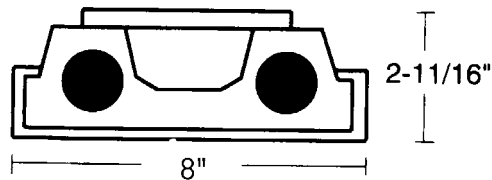

*For critical application verify all dimensions with factory.
 For additional Lamp/Ballast options, consult factory.*