



# COV

JOB NAME:

FIXTURE TYPE:

## COVE MOUNT ACCENT LIGHT

### FEATURES


- Perimeter light source provides excellent wall washing from a concealed source.
- Lamps are staggered to provide a continuous light source without any dark spots or socket shadows.
- Choice of parabolic louver, acrylic lens or open unshielded.
- Available with or without internal reflector.
- Factory assembled to exact specified lengths.

### SPECIFICATIONS

- **HOUSING**  
Die formed heavy gauge steel with anti-rust protection.
- **ELECTRICAL**  
Supplied with high frequency electronic class P, HPF ballasts which comply with Federal Energy Efficiency standards.
- **SHIELDING/REFLECTOR**  
Choice of parabolic louver, paracube louver, acrylic lens, or open unshielded. Standard with white gloss reflector.
- **FINISH**  
All parts finished with post painted white powder coat enamel.
- **CERTIFICATION**  
All units bear UL label, optional Damp Location label. Made in U.S.A. available.



# ORDERING INFORMATION

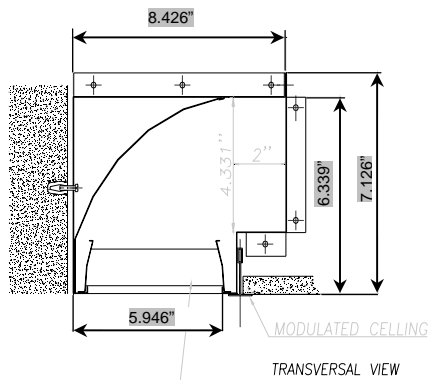

<u>CATALOG NUMBER</u>	<u>LAMP</u>	<u>HEIGHT</u>	<u>WIDTH</u>	<u>LENGTH</u>
COV-117T8	1-F17T8	7.126"	8.426"	24"
COV-217T8	2-F17T8	7.126"	8.426"	24"
COV-125T8	1-F25T8	7.126"	8.426"	36"
COV-225T8	2-F25T8	7.126"	8.426"	36"
COV-132T8	1-F32T8	7.126"	8.426"	48"
COV-232T8	2-F32T8	7.126"	8.426"	48"
COV-114T5	1-F14T5	7.126"	8.426"	24"
COV-214T5	2-F14T5	7.126"	8.426"	24"
COV-121T5	1-F21T5	7.126"	8.426"	36"
COV-221T5	2-F21T5	7.126"	8.426"	36"
COV-128T5	1-F28T5	7.126"	8.426"	48"
COV-228T5	2-F28T5	7.126"	8.426"	48"
COV-124T5HO	1-F24T5HO	7.126"	8.426"	24"
COV-224T5HO	2-F24T5HO	7.126"	8.426"	24"
COV-139T5HO	1-F39T5HO	7.126"	8.426"	36"
COV-239T5HO	2-F39T5HO	7.126"	8.426"	36"
COV-154T5HO	1-F54T5HO	7.126"	8.426"	48"
COV-254T5HO	2-F54T5HO	7.126"	8.426"	48"

## ROW LENGTHS MUST BE SPECIFIED

For critical application, verify all dimensions with factory.

For additional Lamp/Ballast options, consult factory.

## Options:

- For Parabolic Louver – suffix PBL
- For Acrylic Lens – suffix ACR
- Paracube – suffix PCBE
- For Damp Location Label – suffix DL
- Dimming – suffix DIM
- Emergency Battery Pack – suffix EM