



D3

JOB NAME

FIXTURE TYPE

SHALLOW DIRECT/INDIRECT CENTER BASKET

FEATURES

- Provides direct/indirect, soft, uniform illumination.
- Extremely efficient fixture allows for the reduction in the amount of fixtures used in a space.
- Shielding is easily removed for re-lamping.
- No tools required to access ballast compartment.
- Designed specifically for T5 & T5HO lamping technology.

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel housing unitized into one piece.
- **ELECTRICAL**
Energy saving electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
Perforated center diffuser with acrylic inlay for soft, even light output.
- **FINISH**
All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.




Shallow Direct/Indirect Center Basket

Ordering Matrix

CATALOG NO.	SIZE	LAMP
D3-214T5	2x2	2-F14T5
D3-224T5HO	2x2	2-F24T5HO
D3-240BX	2x2	2-BIAX40
D3-228T5	2x4	2-F28T5
D3-254T5HO	2x4	2-F54T5HO

Options:

- Flanged Unit – change prefix to “MD3”
- Emergency Battery Pack – Suffix EM
- Dimming – Suffix DM
- Fused – Suffix GLR

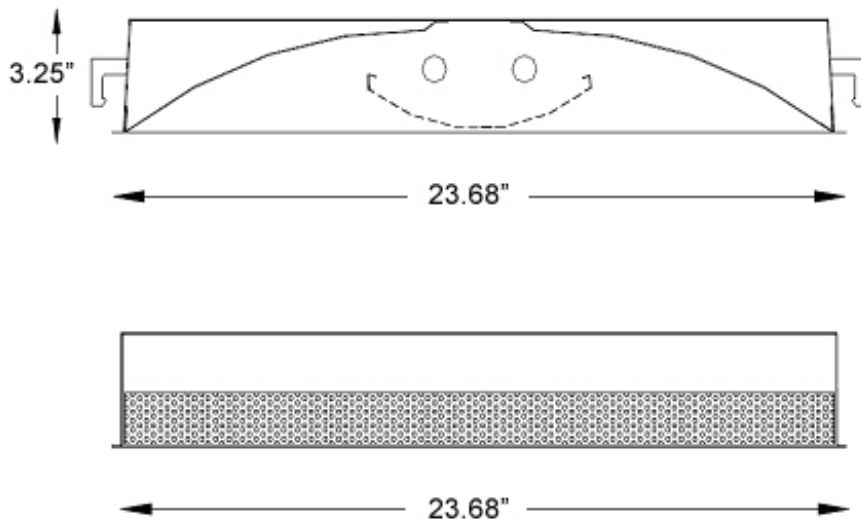

Dimensions subject to change. Consult factory for critical applications.