



D5

JOB NAME

FIXTURE TYPE

SHALLOW FAUX SPLIT BASKET DIRECT/INDIRECT

FEATURES

- Provides direct/indirect, soft, uniform illumination.
- Extremely efficient fixture allows for the reduction in the amount of fixtures used in a space.
- Shielding is easily removed for re-lamping.
- No tools required to access ballast compartment.
- Designed specifically for T5 & T5HO lamping technology.

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel housing unitized into one piece.
- **ELECTRICAL**
Energy saving electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
White perforated center with acrylic inlay and simulated split. Available with acrylic diffuser for improved efficiency.
- **FINISH**
All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.





Shallow Faux Split Basket Direct/Indirect

Ordering Matrix

MODEL	SIZE	LAMP	BALLAST	OPTIONS
D5	1x4	1	T5/EB	MD5
	2x2	2	T5HO/EB	EM
	2x4	3 (T5 Only)		DM
				GLR
				AD

MD5: Flanged Unit
EM: Emergency Battery Pack
DM: Dimming
GLR: Fused
AD: Acrylic Diffuser

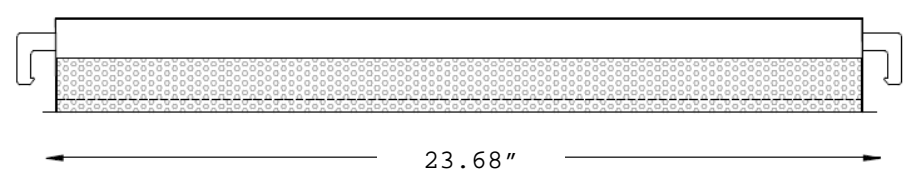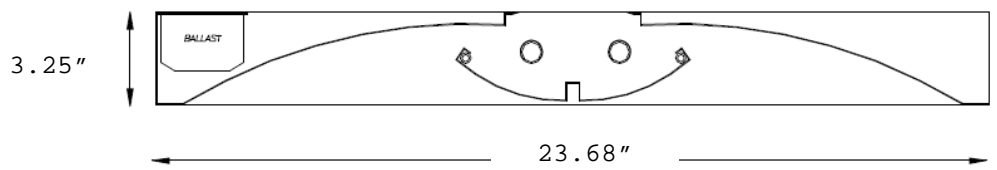

Dimensions subject to change. Consult factory for critical applications.