



# D/I 14-C

JOB NAME:

FIXTURE TYPE:

## 1x4 RECESSED CENTER BASKET GRID INDIRECT TROFFER

### FEATURES

- Provides indirect, soft, uniform illumination.
- Curved perforated details combine recessed fixture advantages with efficient indirect shielding.
- Perforated center basket, backed with reflective white acrylic, controls glare and veiling reflections.
- Shielding is easily removed for re-lamping.
- Flanged fixture available for plaster ceilings.
- Available in array of custom colors.

### SPECIFICATIONS

- **HOUSING**  
Die formed heavy gauge steel housing unitized into one piece.
- **ELECTRICAL**  
Energy saving electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**  
Perforated diffuser element with matte white acrylic overlay.
- **FINISH**  
All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.
- **CERTIFICATION**  
All units bear UL and Made in U.S.A. labels.



# 1x4 Recessed Center Basket Grid Indirect Troffer


## Ordering Matrix

- D/I-14-C-132 (1X4) 1 Light T8 32W
- D/I-14-C-232 (1x4) 2 Light T8 32W
- D/I-14-C-332 (1x4) 3 Light T8 32W
- D/I-14-C-128T5 (1X4) 1 Light T5 28W
- D/I-14-C-228T5 (1X4) 2 Light T5 28W
- D/I-14-C-154T5HO (1X4) 1 Light T5HO 54W
- D/I-14-C-254T5HO (1X4) 2 Light T5HO 54W
- D/I-14-C-354T5HO (1X4) 3 Light T5HO 54W

### Options:

- For Flanged Unit – suffix M
- Custom Color – Suffix C-(color)
- Emergency Battery Pack – suffix EM

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD											
Reflectances		Room Cavity Ratios Index									
Ceilings	Walls	1	2	3	4	5	6	7	8	9	10
80%	50%	68	60	52	47	40	37	33	30	27	24
	30%	65	56	47	40	34	31	28	25	20	18
50%	50%	64	56	50	44	39	35	32	28	25	23
	30%	62	53	46	40	35	30	27	24	21	18

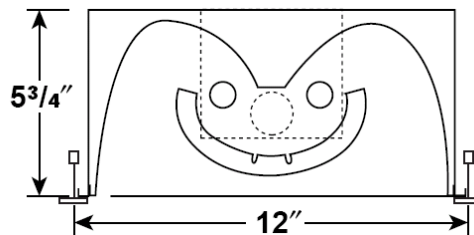

For critical application verify all dimensions with factory.  
For additional Lamp/Ballast options, consult factory.