



D/I-T5

JOB NAME

FIXTURE TYPE

RECESSED ACRYLIC LENSED DIRECT/INDIRECT (Shown with opal lensing)

FEATURES

- Provides direct/indirect, soft, uniform illumination. Delivers 89% efficiency.
- Fixture comes standard with opal lenses. Clear lensing option available.
- Extremely efficient fixture allows for the reduction in the amount of fixtures used in a space.
- Shielding is easily removed for relamping.
- Fixture is designed around T5 & T5HO lamping technology.

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel housing unitized into one piece.
- **ELECTRICAL**
Energy saving electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
Diffuser elements include clear or opal white acrylic.
- **FINISH**
All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.



Robert Lighting and Energy

New


Recessed Center Basket

Ordering Matrix

CATALOG NO.	SIZE	LAMP
D/I-22T5-2T5	2X2	2-F14T5
D/I-22T5-2T5HO	2X2	2-F24T5HO
D/I-24T5-2T5	2X4	2-F28T5
D/I-24T5-2T5HO	2X4	2-F54T5HO

Options:

- Flanged Unit – change prefix to “MD/I”
- Emergency Battery Pack – Suffix EM
- Dimming – Suffix DM
- Clear Lensing – CLR

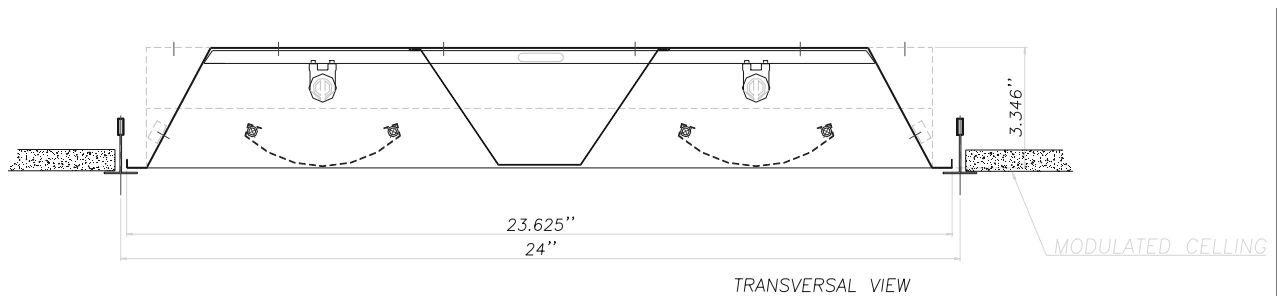

Dimensions subject to change. Consult factory for critical applications.