



# DPT

JOB NAME:

FIXTURE TYPE:

## ***PREMIUM RECESSED TROFFER***

### **FEATURES**

- Premium grade fixture available in 2x2 and 2x4 sizes in 2, 3, and 4 lamp configurations, in T8, T5, U-Bend, and BIAx.
- Welded steel precision doorframe for maximum strength.
- Doorframe hinges from either side and is secured by rotary cam latches. Optional locking screws for impact areas.
- Fully gasketed for light tight fit.
- For mounting in exposed T-Bar (grid) ceilings. Optional flanged construction for various other ceiling types.
- Available with energy efficient reflectors in specular silver (95% reflectance).

### **SPECIFICATIONS**

- **HOUSING**  
Die formed heavy gauge steel unitized into one piece.
- **ELECTRICAL**  
Energy saving electronic ballasts in low, normal, and high B.F. comply with Federal Energy Efficiency standards.
- **SHIELDING**  
100% virgin acrylic prismatic is standard. Consult Option sheet for other shielding.
- **FINISH**  
All metal parts are phosphate coated and painted after fabrication with baked white enamel electrostatically applied providing a durable finish with a minimum 89% reflectance.
- **CERTIFICATION**  
All units bear UL and Made in U.S.A. labels.




# Deep Premium Recessed Troffer

## Ordering Matrix

CATALOG NUMBER	LAMPS	LENGTH	WIDTH	CATALOG NUMBER	LAMPS	LENGTH	WIDTH
DPT-2-231U	2-FB31U	23.625"	23.625"	DPT-2-228T8	2-FO28T8	23.625"	47.638"
DPT-2-232U6T8	2-FB32U6T8	23.625"	23.625"	DPT-2-328T8	3-FO28T8	23.625"	47.638"
DPT-2-339BX	3-F39BX	23.625"	23.625"	DPT-2-428T8	4-FO28T8	23.625"	47.638"
DPT-2-340BX	3-F40BX	23.625"	23.625"	DPT-2-254T5HO	2-F54T5HO	23.625"	47.638"
DPT-2-350BX	3-F50BX	23.625"	23.625"	DPT-2-354T5HO	3-F54T5HO	23.625"	47.638"
DPT-2-355BX	3-F55BX	23.625"	23.625"	DPT-2-454T5HO	4-F54T5HO	23.625"	47.638"
DPT-2-214T5	2-F14T5	23.625"	23.625"	DPT-2-232T8	2-FO32T8	23.625"	47.638"
DPT-2-314T5	3-F14T5	23.625"	23.625"	DPT-2-332T8	3-FO32T8	23.625"	47.638"
DPT-2-414T5	4-F14T5	23.625"	23.625"	DPT-2-432T8	4-FO32T8	23.625"	47.638"
DPT-224T5HO	2-F24T5HO	23.625"	23.625"	DPT-2-228T8	2-FO28T8	23.625"	47.638"

### Options:

- Emergency Battery Pack – suffix EM
- Dimming Ballast – suffix DIM
- Specular Silver Reflector – suffix SS95
- Flange – add M to prefix (MDPT)
- .125" Pattern A12 Lens – suffix 125
- .156" Pattern A12 Lens – suffix 156
- .187" Pattern A19 Lens – suffix 187

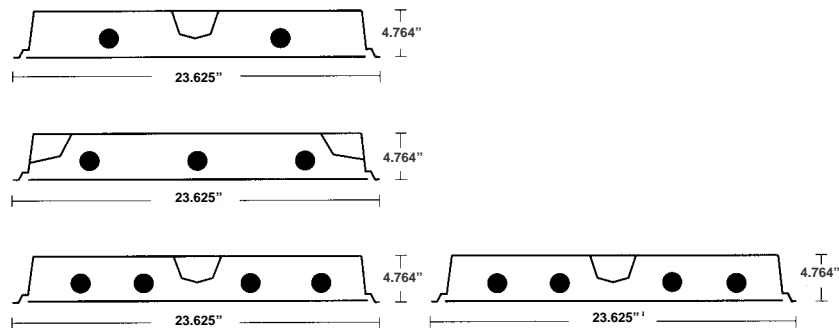

*For critical application verify all dimensions with factory.  
 For additional Lamp/Ballast Options, consult factory.*