

I JW

JOB NAME:

FIXTURE TYPE:

SPECIFICATION GRADE PRISMATIC LENS WALL BRACKET

FEATURES

- Available in standard 2', 3', and 4' lengths in 1 and 2 lamp configurations, T5, T8. Optional custom 1' units for CF lamps
- Versatile unit, can be wall mounted with or without optional upright component for task lighting. Can be under cabinet or corner mounted.
- Optional switch, occupancy sensor, convenience outlet, GFI and cord and plug assembly to meet any requirements.
- Lens is held in place by spring latches for secure fit
- For individual and continuous row mounting.

SPECIFICATIONS

- **HOUSING**
Heavy gauge die formed steel housing.
- **ELECTRICAL**
Electronic ballast complies with Federal Energy Efficiency standards.
- **SHIELDING**
Clear Linear Prismatic in diffuser for glare free illumination. Optional upright lens is ribbed acrylic.
- **FINISH**
All parts painted with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance. Optional powder coat and black or custom finish available.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.




Specification Grade Prismatic Lens Wall Bracket


Ordering Matrix

CATALOG NO.	LAMPS	LENGTH	OPTIONS
IJW-218PLC	2-PLC18	12"	UP
IJW-117T8	1-F17T8	24"	BLK
IJW-217T8	2-F17T8	24"	RSW
IJW-125T8	1-F25T8	36"	CO
IJW-225T8	2-F25T8	36"	GFCI
IJW-132T8	1-F32T8	48"	CP8
IJW-232T8	2-F32T8	48"	OC
IJW-214T5	2-F14T5	24"	
IJW-228T5	2-F28T5	48"	
IJW-224T5HO	2-F24T5HO	24"	
IJW-254T5HO	2-F54T5HO	48"	

UP: Uplight Component
BLK: Black Finish
RSW: Rocker Switch
CO: Convenience Outlet
GFCI: GFI Outlet
CP8: Cord & Plug (6' Standard)
OC: Occupancy Sensor

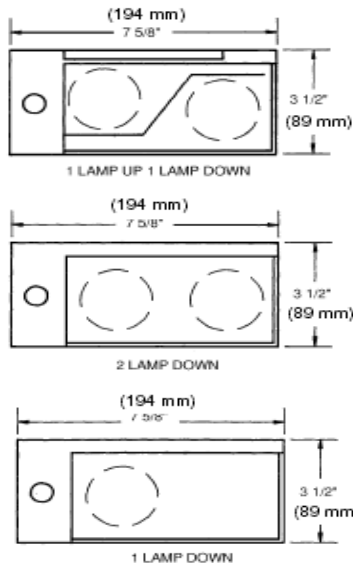

Fixture Efficiency = 64.8%

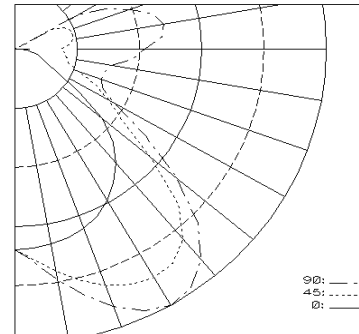

CATALOG No.: **IJW-240ESB**

2 lamps, 3150 lumens per lamp
 Ballast Factor = 1.0
 Input Watts = 90

*For additional Lamp/Ballast combinations, consult factory.
 Dimensions subject to change, consult factory for critical applications.*