

# LI

JOB NAME

FIXTURE TYPE

## **ULTRA SHALLOW UNDER CABINET LUMINAIRE**

### **FEATURES**

- Available in 12", 21", 22", 24", 33", 34", 42", and 46" lengths.
- Ultra thin profile, specification grade under cabinet fixture.
- Offers efficient on-task illumination in areas obscured from overhead lighting.
- For individual or continuous row mounting.
- One piece unitized wireway contains all electrical components.
- Keyhole slots for ease of installation.
- Special 5/8" connector supplied to facilitate wiring.
- Optional rocker switch, convenience outlet and cord and plug to meet any mounting requirement.

### **SPECIFICATIONS**

- **HOUSING**  
Die formed heavy gauged steel. Housing and ends are one piece.
- **ELECTRICAL**  
Energy saving electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**  
Snap-in ribbed opal lens for soft pleasing light is standard. Optional task lighting lens with opaque front and ribbed bottom.
- **FINISH**  
Standard finish is baked white enamel. Optional finishes are oak, walnut, and chrome. Interior reflecting surfaces are baked white enamel with a minimum 89% reflectance.
- **CERTIFICATION**  
All units bear UL and Made in U.S.A. labels.




# Ultra Shallow Under Cabinet Luminaire

Ordering Matrix

CATALOG NUMBER	LAMPS	LENGTH
LI-8	1-T5-8W	12-3/16"
LI-13	1-T5-13W	21-3/16"
LI-14T5	1-T5-14W	22-19/32"
LI-16	2-T5-8W	24-7/16"
LI-21	1-15-8W/1-T5-13W	33-7/16"
LI-21T5	1-T5-21W	34-7/16"
LI-26	2-T5-13W	42-7/16"
LI-28T5	1-T5-28W	46-7/32"
LI-24T5HO	1-T5HO-24W	22-19/32"
LI-39T5HO	1-T5HO-39W	34-7/16"
LI-54T5HO	1-T5HO-54W	46-7/32"

**Options:**

- Rocker Switch – suffix RSW
- Convenience Outlet – suffix CO
- 6' Cord and Plug wired in (120V) – suffix CP6'
- Fixture with Lamps Installed – suffix – L
- Opaque Task Light Lens – suffix OTL

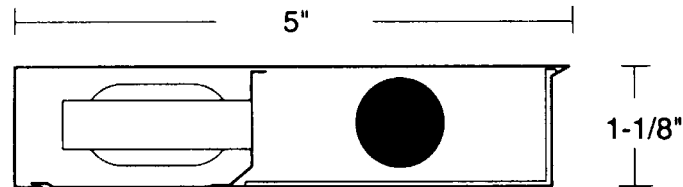

*For critical application verify all dimensions with factory.  
 For additional Lamp/Ballast options, consult factory.*