

S69

JOB NAME:

FIXTURE TYPE:

SURFACE OR WALL MODULAR LUMINAIRE

(Shown with parabolic louver)

FEATURES

- Available in 2', 3', 4', 6', and 8' lengths, in 1, 2 and 3 lamp configurations, T8 and T5.
- 9"x6" narrow design is architecturally preferred for installation in corridors, lobbies, and office areas.
- Direct down light is standard. Indirect and direct/indirect applications are available as options.
- Individual and continuous row for both surface and pendant mounting.
- Ends seams are fitted to provide the appearance of continuous smooth channel.
- Knockouts on channel ends allow for through wiring or end feed.
- For full complement of accessories to ease installation, refer to **Options** section.

SPECIFICATIONS

- **HOUSING**
Die formed welded heavy gauge cold rolled steel. Uplight fixtures are provided with (2) rows of 1/2" apertures along top of the housing which provide approximately 12% uplight.
- **ELECTRICAL**
Electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
Acrylic prismatic is standard. Optional white cross baffle, paracube, and parabolic semi-specular cross baffle. Refer to **Options** for additional shielding.
- **FINISH**
All metal parts post painted with premium grade white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.
- **CERTIFICATION**
All units bear UL label, and labeled Made in U.S.A.



SURFACE OR WALL MODULAR LUMINAIRE


Ordering Matrix

MODEL	LAMPS	LENGTH	LAMP/BALLAST	LENS	MOUNTING	OPTIONS
S69	1	2'	EB/T8	AL	AC	SS95
	2	3'	EB/T5	WCB	PENT	SA95
	3	4'	EB/T5HO	PCB	SM	D/I
		6'			WM	
		8'				

AL: Acrylic Lens
WCB: White Cross Baffle
PCB: Parabolic Cross Baffle

AC: Aircraft Cable/Canopy Kit
PENT: Pendant Mount
SM: Surface Mount
WM: Wall Mount

SS95: Specular Silver Reflector
SA95: Specular Aluminum Reflector
D/I: Direct/Indirect

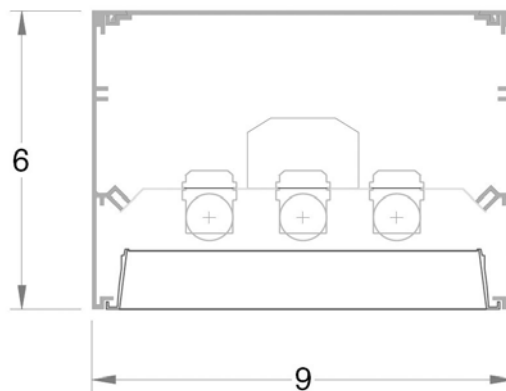

For critical application verify all dimensions with factory.
 For additional Lamp/Ballast options, consult factory.