

25

JOB NAME:

FIXTURE TYPE:



PRISMATIC LENS WALL BRACKET

FEATURES

- Available in 2', 3', and 4' lengths in 1 and 2 lamp configurations, T5 and T8.
- Versatile unit, can be wall mounted with or without optional uplite component for task lighting or can be under cabinet or corner mounted.
- Optional switch, convenience outlet, and cord and plug assembly to meet any requirements.
- For individual and continuous row mounting.

SPECIFICATIONS

- **HOUSING**
Heavy gauge die formed steel housing and end plates.
- **ELECTRICAL**
Electronic instant start HPF ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
Clear Linear Prismatic snap- in diffuser for glare free illumination.
- **FINISH**
All parts finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.



Prismatic Lens Wall Bracket



Ordering Matrix

CATALOG NUMBER T8	LAMPS	LENGTH	CATALOG NUMBER T5	LAMPS	LENGTH
25-117	1-F17	24-1/2"	25-114	1-F14T5	24-1/2"
25-217	2-F17	24-1/2"	25-214	2-F14T5	24-1/2"
25-125	1-F25	36-1/4"	25-121	1-F21T5	36-1/4"
25-225	2-F25	36-1/4"	25-221	2-F21T5	36-1/4"
25-132	1-F32	48-1/4"	25-128	1-F28T5	48-1/4"
25-232	2-F32	48-1/4"	25-228	2-F28T8	48-1/4"

Options:

- Convenience Outlet – suffix CO
- Pull Chain – suffix SW
- Uplite Component – suffix UP

25 SERIES WITH UPLITE COMPONENT

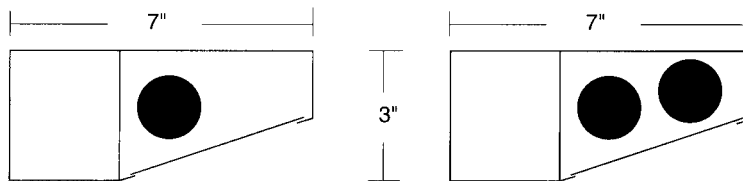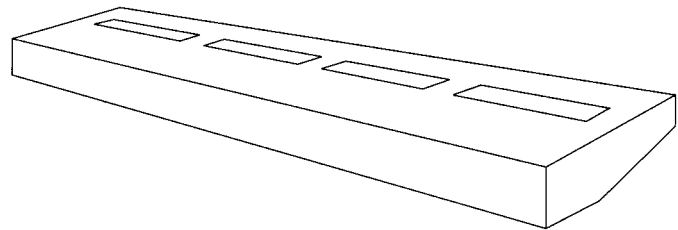

*For critical application verify all dimensions with factory.
For additional Lamp/Ballast options, consult factory.*