

25

JOB NAME:

FIXTURE TYPE:



PRISMATIC LENS WALL BRACKET

FEATURES

- Available in 2', 3', and 4' lengths in 1 and 2 lamp configurations, T5 and T8.
- Versatile unit, can be wall mounted with or without optional uplite component for task lighting or can be under cabinet or corner mounted.
- Optional switch, convenience outlet, and cord and plug assembly to meet any requirements.
- For individual and continuous row mounting.

SPECIFICATIONS

- **HOUSING**
Heavy gauge die formed steel housing and end plates.
- **ELECTRICAL**
Electronic instant start HPF ballasts comply with Federal Energy Efficiency standards. Ballasts operate on 120V-277V (UNV) unless specified otherwise.
- **SHIELDING**
Clear Linear Prismatic snap- in diffuser for glare free illumination.
- **FINISH**
All parts finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels. Suitable for use in damp locations.



Prismatic Lens Wall Bracket



Ordering Matrix

MODEL	LAMPS	WATTAGE	LENGTH	CATALOG NUMBER T5	VOLTAGE	OPTIONS
25-117	1-F17		24-1/2"	25-114	1-F14T5	24-1/2"
25-217	2-F17		24-1/2"	25-214	2-F14T5	24-1/2"
25-125	1-F25		36-1/4"	25-121	1-F21T5	36-1/4"
25-225	2-F25		36-1/4"	25-221	2-F21T5	36-1/4"
25-132	1-F32		48-1/4"	25-128	1-F28T5	48-1/4"
25-232	2-F32		48-1/4"	25-228	2-F28T5	48-1/4"

Options:

- Convenience Outlet – suffix CO
- Pull Chain – suffix SW
- Uplite Component – suffix UP

25 SERIES WITH UPLITE COMPONENT

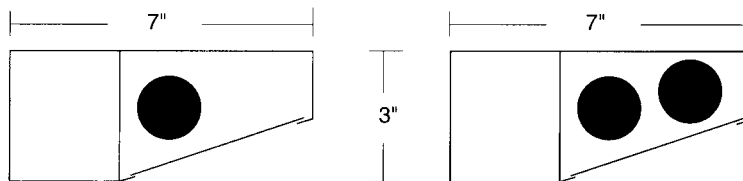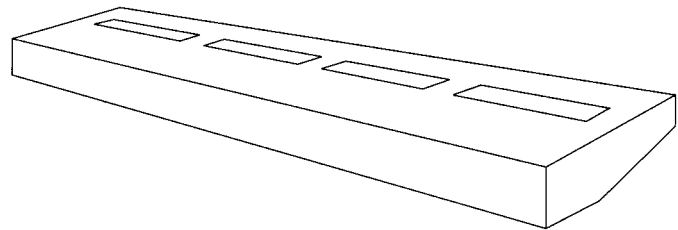

*For critical application verify all dimensions with factory.
For additional Lamp/Ballast options, consult factory.*