

CVPL

JOB NAME:

FIXTURE TYPE:



DECORATIVE CAST ALUMINUM LUMINAIRE

FEATURES

- Available for energy efficient PL 1 and 2 lamp and low wattage HPS sources.
- Ideal for hotels, motels, walkways, entrances, garages, vanities, stairways, and any area where low wattage, high illumination is desired.
- Gasketed for dust and moisture resistance.
- Optional photocell for dusk to dawn operation.
- Ideal for wet locations.

SPECIFICATIONS

- **HOUSING**
One piece die-cast aluminum housing.
- **SHIELDING**
Clear prismatic acrylic is standard. Optional white acrylic and clear prismatic polycarbonate.
- **ELECTRICAL**
Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.
- **FINISH**
All exterior parts finished in architectural bronze stage polyester powder coat. Optional white finish. All reflecting surfaces are finished with baked white enamel.
- **CERTIFICATION**
All units bear UL Wet Location and Made in U.S.A. labels.




Decorative Cast Aluminum Luminaire

Ordering Matrix

CATALOG NUMBER	LAMPS	LENGTH	DEPTH
CVPL-179	1-PL7 OR 1-PL9	13-1/4"	3"
CVPL-279	2-PL7 OR 2-PL9	13-1/4"	3"
CVPL-113	1-PL13	13-1/4"	3"
CVPL-213	2-PL13	13-1/4"	3"
CVPL-35HPS	1-35HPS	13-1/4"	3-3/4"
CVPL-50HPS	1-50HPS	13-1/4"	3-3/4"

Options:

- White Opal Acrylic – suffix WA
- Prismatic Polycarbonate – suffix LEX
- Photocell – suffix PC
- White Finish Housing – suffix WHT

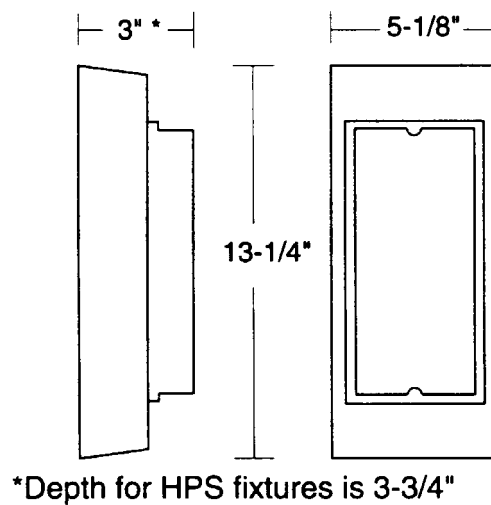

*For critical application verify all dimensions with factory.
For additional Lamp/Ballast options consult factory.*