

# OSL

JOB NAME:

FIXTURE TYPE:



## ***OUTDOOR SIGN LIGHT***

### **FEATURES**

- Available in 4', 6', 8', 12' tandem and 16' tandem lengths.
- Extruded aluminum housing with integral enclosure and retaining grooves.
- Rugged cast aluminum end caps with integral hub to accommodate end splice box.
- Die cast aluminum end splice boxes tapped for 3/4" conduit. Removable die cast end caps allow for individual or continuous row mounting. Fixture can swivel 360° with splice box mounting.
- All weather lamp holders with integral gasket.
- Extruded clear acrylic enclosure.

### **SPECIFICATIONS**

- **HOUSING**  
Extruded aluminum for durable, weatherproof construction. Housing is high reflectivity powder coat white. Ends are cast aluminum finish.
- **ELECTRICAL**  
Remote Mount Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards. Optional weatherproof ballast box.
- **SHIELDING**  
Clear extruded acrylic shield locks into full length groove. Stainless steel lens retaining brackets are easily removed for re-lamping.
- **CERTIFICATION**  
All units bear for wet and damp locations, and labeled Made in U.S.A. available.




# Outdoor Sign Light

## Ordering Matrix

CATALOG NUMBER	LAMPS	LENGTH
OSL-117T8	1-F17T8	25-1/4"
OSL-125T8	1-F25T8	37-1/4"
OSL-132T8	1-F32T8	49-1/4"
OSL-125T8-6TD	1-F25T8	74-1/2"
OSL-128T5	1-F28T5	49-1/4"
OSL-128T5-8TD	2-F28T5	97-1/4"
OSL-228T5	2-F28T5	49-1/4"
OSL-228T5-8TD	4-F28T5	97-1/4"
OSL-196 HO	1-F96HO	97-1/4"
OSL-172 HO-12TD	2-F72HO	146-1/2"
OSL-196 HO-16TD	2-F96HO	194-1/2"
OSL-148 VHO	1-F48VHO	49-1/4"
OSL-172 VHO	1-F72VHO	73-1/4"
OSL-196 VHO	1-F96VHO	97-1/4"
OSL-172 VHO-12TD	2-F72VHO	146-1/2"
OSL-196 VHO-16TD	2-F96VHO	194-1/2"
OSL-248 HO	2-F48HO	49-1/4"
OSL-272 HO	2-F72HO	73-1/4"
OSL-296 HO	2-F96HO	97-1/4"
OSL 248 VHO	2-F48VHO	49-1/4"
OSL-272 VHO	2-F72VHO	73-1/4"
OSL-296 VHO	2-F96VHO	97-1/4"
OSL-154T5HO	1-F54T5HO	49-1/4"
OSL-254T5HO	2-F54T5HO	49-1/4"

### Options:

- Additional splice box for tandem units mounted separately – suffix OSL/SB
- Custom Color– suffix CC
- Weatherproof Ballast Box – suffix WBB

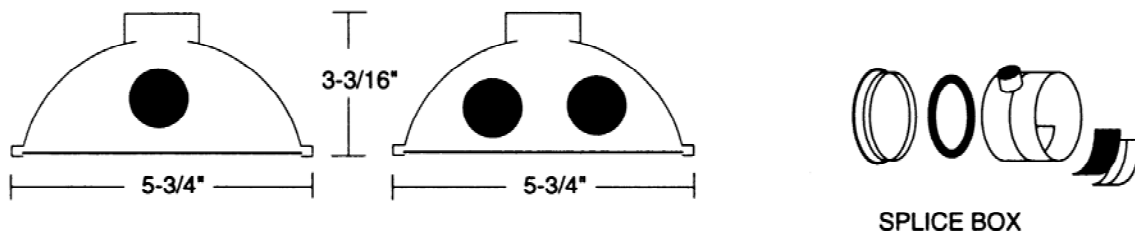

*For critical application verify all dimensions with factory.  
 Single units supplied with 2 splice boxes – tandem units supplied with 3  
 Consult factory for T8HO and T5HO units.*