

PVT

JOB NAME

FIXTURE TYPE

MOLDED VAPOR TIGHT LUMINAIRE

Shown with optional weather proof Hub

FEATURES

- Available in 4' and 8' lengths, 1, 2 & NEW 3 lamp configurations.
- Weather resistant molded fiberglass reinforced housing ideal for areas where moisture protection is required.
- Interior metal parts finished in premium grade white enamel for maximum reflectance and durability.
- Neoprene gasket bonded to inside perimeter of the housing provides dust and moisture resistance.
- Molded cam latches insure tight seal. Six latches provided on the 4' housing, twelve on the 8' housing.
- Tamperproof and Stainless Steel latches are optional.
- For surface or pendant mounting.
- Chain mounting kit optional.
- For individual or continuous row with optional water-tight hubs.
- Available with energy efficient reflectors in specular silver (95% reflectance) or specular aluminum (85% reflectance).

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel housing completely enclosed in a heavy duty gasketed high impact polyester fiberglass housing.
- **ELECTRICAL**
Energy saving and electronic ballasts comply with Federal Energy Efficiency standards. Electronic ballasts standard with T5 and T8. Optional with T12 units
- **SHIELDING**
Acrylic lens with pebbled pattern interior is standard. Opal acrylic, prismatic polycarbonate, or high impact 100% DR acrylic diffusers are optional.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels. NPA and OSHA approved. Damp and Wet Location labeled. For National Sanitation Foundation (NSF) approval (consult factory).




Molded Vapor Tight Luminaire

Ordering Matrix

CATALOG NUMBER T8	LAMPS	LENGTH	CATALOG NUMBER T5	LAMPS	LENGTH
PVT-132	1-F32T8	50"	PVT-128T5	1-F28T5	50"
PVT-132-8TD	2-F32T8	98"	PVT-128-8TD	2-F28T5	98"
PVT-232	2-F32T8	50"	PVT-228T5	2-F28T5	50"
PVT-232-8TD	4-F32T8	98"	PVT-228T5-8TD	4-F28T5	98"
PVT-196 SL	1-F96T12	98"	PVT-154T5-HO	1-F54T5HO	50"
PVT-296 SL	2-F96T12	98"	PVT-154T5-8TD	2-F54T5HO	98"
PVT-148 HO	1-F48T12HO	50"	PVT-332	3-FO32T8	50"
PVT-248 HO	2-F48T12HO	50"	PVT-332-8TD	6-FO32T8	98"
PVT-196 HO	1-F96T12HO	98"	PVT-196-T8	1-FO96T8	98"
PVT-296 HO	2-F96T12HO	98"	PVT-296-T8	2-FO96T8	98"

Options:

- Electronic Ballast for T12 – suffix SSB-T12
- High Performance Ballast - HI
- Prismatic Polycarbonate (Lexan) Lens – suffix LEX
- 100% DR acrylic Lens – suffix 100DR
- Opal Acrylic Lens – suffix OPAL
- Advantage X Lamps - ADVX
- Stainless Steel Cam Latches – suffix SSL
- Wet Location Hub – suffix HUB
- Specular Silver Reflector – suffix SS95
- Specular Aluminum Reflector – suffix SA85
- Tamperproof Latches – suffix TP

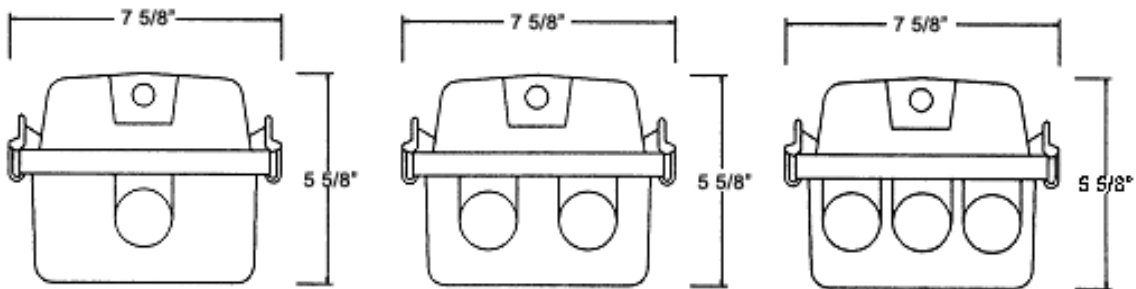

*For additional Lamp/Ballast options, consult factory.
 Consult factory for 2' units
 Dimension subject to change. Consult Factory for critical applications*