



SPVT

JOB NAME

FIXTURE TYPE

MOLDED VAPOR TIGHT LUMINAIRE

FEATURES

- Available in 4', and 8' lengths, 1, 2 & 3 lamp T8, T5, and T5HO configurations.
- Weather resistant housing ideal for parking garages, food processing areas, refrigerated storage, marinas, or any area where moisture protection is required.
- Internal gear tray replaces traditional strip fixture insert, reducing both weight and expense.
- Poured in place gasket and cam latches seal the enclosures from most hostile environments.
- Polycarbonate or stainless steel latches. Tamperproof latches also available.
- For surface or pendant mounting. Optional stainless steel snap-in mounting brackets reduce installation time and eliminate mounting holes in fixture body.
- For individual or continuous row with optional watertight hubs.

SPECIFICATIONS

- **HOUSING**
Heavy-duty unsaturated polyester housing with foamed in place gasketing. Flame class V-0, 5VA.
- **ELECTRICAL**
Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
Ribbed diffuser is molded of UV stabilized acrylic/DR blend to resist breakage and maintain flexibility. Optional polycarbonate diffuser available.
- **CERTIFICATION**
All units bear UL label. Wet Location label for National Sanitation Foundation (NSF) Approval available. IP65 rated. IP67 rated when used with 8 latch configuration. Approved for use in New York City projects.



Molded Vapor Tight Luminaire


Ordering Matrix

| CATALOG NO. | LAMPS | LENGTH |
|------------------|-----------|--------|
| SPVT-132 | 1-F032T8 | 48" |
| SPVT-132-8TD | 2-F032T8 | 96" |
| SPVT-232 | 2-F032T8 | 48" |
| SPVT-232-8TD | 4-F032T8 | 96" |
| SPVT-332 | 3-F032T8 | 48" |
| SPVT-332-8TD | 6-F032T8 | 96" |
| SPVT-128T5 | 1-F28T5 | 48" |
| SPVT-128T5-8TD | 2-F28T5 | 96" |
| SPVT-228T5 | 2-F28T5 | 48" |
| SPVT-228T5-8TD | 4-F28T5 | 96" |
| SPVT-328T5 | 3-F28T5 | 48" |
| SPVT-328T5-8TD | 6-F28T5 | 96" |
| SPVT-154T5HO | 1-F54T5HO | 48" |
| SPVT-154T5HO-8TD | 2-F54T5HO | 96" |
| SPVT-254T5HO | 2-F54T5HO | 48" |
| SPVT-254T5HO-8TD | 4-F54T5HO | 96" |
| SPVT-354T5HO | 3-F54T5HO | 48" |


Options:

- Stainless Steel Cam Latches – suffix SSL
- Wet Location Hub – suffix HUB
- Tamperproof Latches – suffix TP
- Emergency Battery Pack – suffix EM
- Stainless Steel Mounting Brackets – suffix SSMB
- Factory Installed High Bay Occupancy Sensors – suffix OC
- Specular Silver Reflector (93-95% Reflectance) – suffix SS95
- Polycarbonate Diffuser – suffix POLY
- High Performance Light Output – suffix HPLO
- Ballast Enclosed in NYC Housing – suffix NYC

Deep Unit

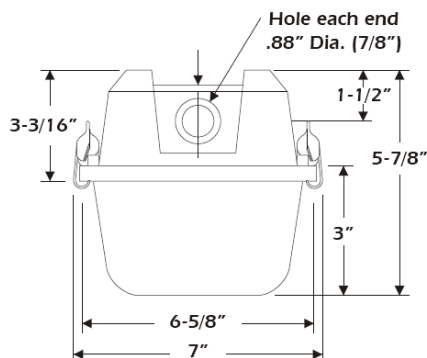

Shallow Unit

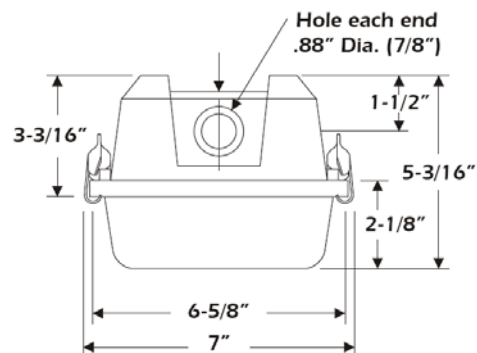

For critical application verify all dimensions with factory. Electronic Ballast standard on all T8, T5, and T5HO units. For additional Lamp/Ballast options, consult factory. Consult factory for 2' units.