



# VFLHB

JOB NAME:

FIXTURE TYPE:

## VAPOR TIGHT FLUORESCENT HIGH BAY LUMINAIRE

### FEATURES

- Extra wide unit is available in 4 and 6 lamp T8, T5, and T5HO configurations.
- Weather resistant housing ideal for parking garages, food processing areas, pool areas, refrigerated storage, marinas, or any area where dirt or moisture protection is required.
- Optional specular reflector is engineered to provide a highly efficient wide spread distribution. Standard with white reflector.
- Standard with stainless steel latches. Optional tamperproof latches.
- For pendant mounting. Stainless steel mounting brackets reduce installation time and eliminate the need for mounting holes in fixture body.
- Stainless steel V hooks simplify pendant mounting with chain or cable.
- For individual or continuous row with flexible conduit and optional watertight hubs.

### SPECIFICATIONS

- **HOUSING**  
Heavy-duty unsaturated fiberglass reinforced polyester housing with poured in place gasketing. Flame class 5VA.
- **ELECTRICAL**  
Electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**  
Glass clear diffuser is molded of UV stabilized impact resistant acrylic. Optional clear UV stabilized polycarbonate diffuser available for increased impact resistance and for both elevated temperatures and extreme cold temperatures.
- **CERTIFICATION**  
All units bear UL label. IP67 Certified. National Sanitation Foundation (NSF) standard 2 listing. NEMA 4X rated. Manufactured in the USA. Factory hose-down tested at 1500 PSI, 1.4 gallons/minute @ 12-24".





# Vapor Tight Fluorescent High Bay

## Ordering Matrix

CATALOG NUMBER	LAMPS	LENGTH
VFLHB-432T8	4-FO32T8	48"
VFLHB-632T8	6-FO32T8	48"
VFLHB-428T5	4-F28T5	48"
VFLHB-628T5	6-F28T5	48"
VFLHB-454T5HO	4-F54T5HO	48"
VFLHB-654T5HO	6-F54T5HO	48"

### Options:

- Polycarbonate Lens- suffix LEX
- Wet Location Hub – suffix HUB
- Stainless Steel V Hooks – suffix SSV
- Tamperproof Latches – suffix TP
- Emergency Battery Pack – suffix EM
- Factory Installed High Bay Occupancy Sensor – suffix OC
- Dimming Ballast(s) – suffix DIM
- Specular Reflector – suffix SS95
- WG – Wire Guard

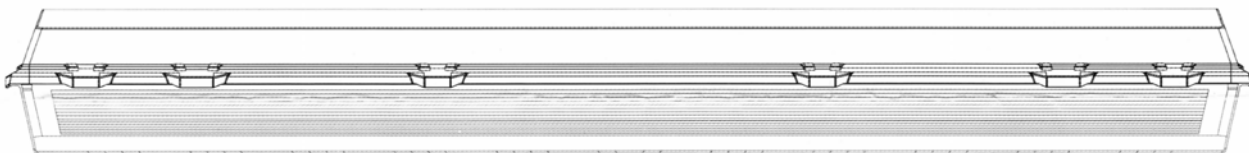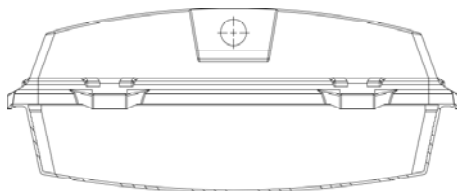

Width: 14.61" • 371mm    Length: 51.91" • 1319mm    Depth: 5.95" • 151mm

*For critical application verify all dimensions with factory.  
For additional Lamp/Ballast options, consult factory.*