

# VPVT



JOB NAME:

FIXTURE TYPE:

## ***MOLDED VAPOR TIGHT LUMINAIRE***

### **FEATURES**

- Available in 2', 4', and 8' lengths, 1, 2 & 3 lamp T8, T5, and T5HO configurations.
- Weather resistant housing ideal for parking garages, food processing areas, refrigerated storage, marinas, or any area where moisture protection is required.
- Internal gear tray replaces traditional strip fixture insert, reducing both weight and expense.
- Poured in place gasket and cam latches seal the enclosures from most hostile environments.
- Polycarbonate or stainless steel latches. Tamperproof latches also available.
- For surface or pendant mounting. Optional stainless steel snap-in mounting brackets reduce installation time and eliminate mounting holes in fixture body.
- For individual or continuous row with optional watertight hubs.

### **SPECIFICATIONS**

- **HOUSING**  
Heavy-duty unsaturated polyester housing with foamed in place gasketing. Flame class V-0, 5VA.
- **ELECTRICAL**  
Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**  
Ribbed diffuser is molded of UV stabilized acrylic/DR blend to resist breakage and maintain flexibility. Single lamp unit is standard with a polycarbonate lens.
- **CERTIFICATION**  
All units bear UL label. IP67 Certified. National Sanitation Foundation (NSF) standard 2 conformance. Manufactured in the USA.




# Molded Vapor Tight Luminaire

## Ordering Matrix

<b>CATALOG NO.</b>	<b>LAMPS</b>	<b>LENGTH</b>
VPVT-217	2-F017T8	24"
VPVT-132	1-F032T8	48"
VPVT-132-8TD	2-F032T8	96"
VPVT-232	2-F032T8	48"
VPVT-232-8TD	4-F032T8	96"
VPVT-332	3-F032T8	48"
VPVT-332-8TD	6-F032T8	96"
VPVT-214T5	2-F14T5	24"
VPVT-128T5	1-F28T5	48"
VPVT-128T5-8TD	2-F28T5	96"
VPVT-228T5	2-F28T5	48"
VPVT-228T5-8TD	4-F28T5	96"
VPVT-328T5	3-F28T5	48"
VPVT-328T5-8TD	6-F28T5	96"
VPVT-224T5HO	2-F24T5HO	24"
VPVT-154T5HO	1-F54T5HO	48"
VPVT-154T5HO-8TD	2-F54T5HO	96"
VPVT-254T5HO	2-F54T5HO	48"
VPVT-254T5HO-8TD	4-F54T5HO	96"
VPVT-354T5HO	3-F54T5HO	48"

### Options:

- Stainless Steel Cam Latches – suffix SSL
- Wet Location Hub – suffix HUB
- Tamperproof Latches – suffix TP
- Emergency Battery Pack – suffix EM
- Stainless Steel Mounting Brackets – suffix SSMB
- Factory Installed High Bay Occupancy Sensors – suffix OC
- 20 Gauge Steel Ballast Mount Plate – suffix NYC

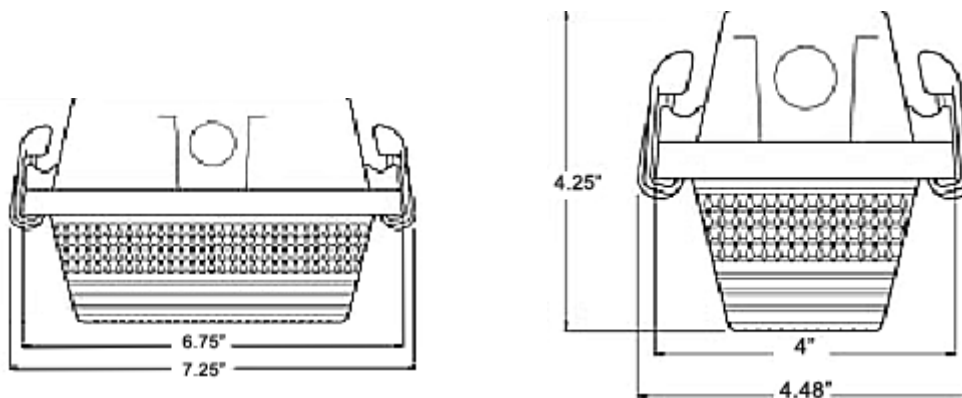

*For critical application verify all dimensions with factory.  
For additional Lamp/Ballast options, consult factory.  
Consult factory for 2' units.*