



VPVT

JOB NAME:

FIXTURE TYPE:

MOLDED VAPOR TIGHT LUMINAIRE

FEATURES

- Available in 2', 4', and 8' lengths, 1, 2 & 3 lamp T8, T5, and T5HO configurations.
- Weather resistant housing ideal for parking garages, food processing areas, refrigerated storage, marinas, or any area where moisture protection is required.
- Internal gear tray replaces traditional strip fixture insert, reducing both weight and expense.
- Poured in place gasket and cam latches seal the enclosures from most hostile environments.
- Polycarbonate or stainless steel latches. Tamperproof latches also available.
- For surface or pendant mounting. Optional stainless steel snap-in mounting brackets reduce installation time and eliminate mounting holes in fixture body.
- For individual or continuous row with optional watertight hubs.
- Optional specular aluminum wide distribution reflector available.

SPECIFICATIONS

- **HOUSING**
Heavy-duty unsaturated fiberglass reinforced polyester housing with poured in place gasketing. Flame class V-0, 5VA.
- **ELECTRICAL**
Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts operate on 120V-277V (UNV) unless specified otherwise.
- **SHIELDING**
Ribbed diffuser is molded of UV stabilized acrylic/DR blend to resist breakage and maintain flexibility. Optional polycarbonate lens available in 2' and 4' only. Single lamp narrow unit is standard with a polycarbonate lens.
- **CERTIFICATION**
All units bear UL wet location label. IP67 Certified. National Sanitation Foundation (NSF) standard 2 conformance. Manufactured in the USA. Passed 1500 PSI high pressure hose down test.



Molded Vapor Tight Luminaire

Ordering Matrix


CATALOG NO.	LAMPS	LENGTH
VPVT-217	2-F017T8	24"
VPVT-132	1-F032T8	48"
VPVT-132-8TD	2-F032T8	96"
VPVT-232	2-F032T8	48"
VPVT-232-8TD	4-F032T8	96"
VPVT-332	3-F032T8	48"
VPVT-332-8TD	6-F032T8	96"
VPVT-296HO	2-F096T8HO	96"
VPVT-259	2-F059T8	96"
VPVT-214T5	2-F14T5	24"
VPVT-128T5	1-F28T5	48"
VPVT-128T5-8TD	2-F28T5	96"
VPVT-228T5	2-F28T5	48"
VPVT-228T5-8TD	4-F28T5	96"
VPVT-328T5	3-F28T5	48"
VPVT-328T5-8TD	6-F28T5	96"
VPVT-224T5HO	2-F24T5HO	24"
VPVT-154T5HO	1-F54T5HO	48"
VPVT-154T5HO-8TD	2-F54T5HO	96"
VPVT-254T5HO	2-F54T5HO	48"
VPVT-254T5HO-8TD	4-F54T5HO	96"
VPVT-354T5HO	3-F54T5HO	48"

Options:

- Stainless Steel Cam Latches – suffix SSL
- Wet Location Hub – suffix HUB
- Tamperproof Latches – suffix TP
- Emergency Battery Pack – suffix EM
- Stainless Steel Mounting Brackets – suffix SSMB
- Specular Aluminum Reflector (>93% Reflectance) – suffix SS95
- Factory Installed Occupancy Sensors – suffix OC
- Single Point Mount Hub – suffix SPM HUB
- Photocell – suffix PC(Voltage)
- Polycarbonate Lens– suffix POLY
- Factory Installed Cord and Plug (Specify Voltage & Length) – suffix CP(length-voltage)
- Water Clear Lens – suffix WCL
- Lens Tether – suffix LNST
- Wide Distribution Reflector – suffix WDR
- 90 degree corner mounting bracket – suffix CMB

For critical application verify all dimensions with factory. For additional Lamp/Ballast options, consult factory. Consult factory for 2' units.

STANDARD UNIT

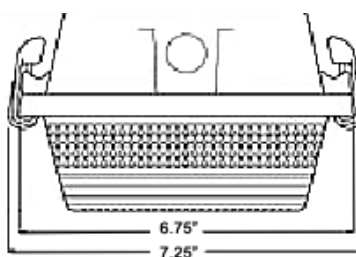

NARROW 1 LIGHT

