



# 12SQ

JOB NAME

FIXTURE TYPE

## 12" X 12" SQUARE RECESSED SERIES

### FEATURES

- 12SQ series designed for recessing in virtually any type of ceiling
- Available in Compact Fluorescent, HID and NEW LED.
- Standard with flush lens that presents a clean appearance.
- Door Frame available in white (standard), black, or custom color.
- Positive locking stainless hardware for easy re-lamping.
- Ballast/Driver is fully serviceable from the ceiling aperture.
- 27" Bar hangers are standard. Optional "T" bar clips.
- Optional tamperproof hardware.

### SPECIFICATIONS

- **HOUSING**  
Die formed 18 gauge galvanized steel housing.
- **ELECTRICAL**  
Electronic class P, HPF 120/277v ballasts comply with Federal Energy Efficiency standards.
- **SHIELDINGS**  
Clear Tempered Glass is standard. Optional prismatic glass, drop opal glass, and drop opal acrylic.
- **FINISH**  
Door frame is standard in white. Optional black or custom color.
- **CERTIFICATION**  
All units bear UL and Made in U.S.A. labels. UL Listed for Damp Location. Optional UL Wet Location label.




# 12 X12 SQUARE SERIES

## Ordering Matrix

| MODEL | WATTAGE                       | LAMP TYPE |
|-------|-------------------------------|-----------|
| 12SQ  | 2-26<br>2-32<br>2-42<br>2-57  | CF        |
|       | 50<br>70<br>100<br>150<br>175 | PS-MH     |
|       | 24                            | LED       |

### Options:

- Black Door Frame – suffix BLK
- Prismatic Tempered Glass – suffix PG
- Drop Opal Glass lens- suffix DOG
- Drop Opal Acrylic Lens-suffix DOA
- Emergency Battery Pack (Compact Fluorescent only) - suffix EM
- UL Wet Location Label– suffix WL
- T-bar clips (for grid ceilings)– suffix TBC
- Tamperproof Hardware – suffix TP

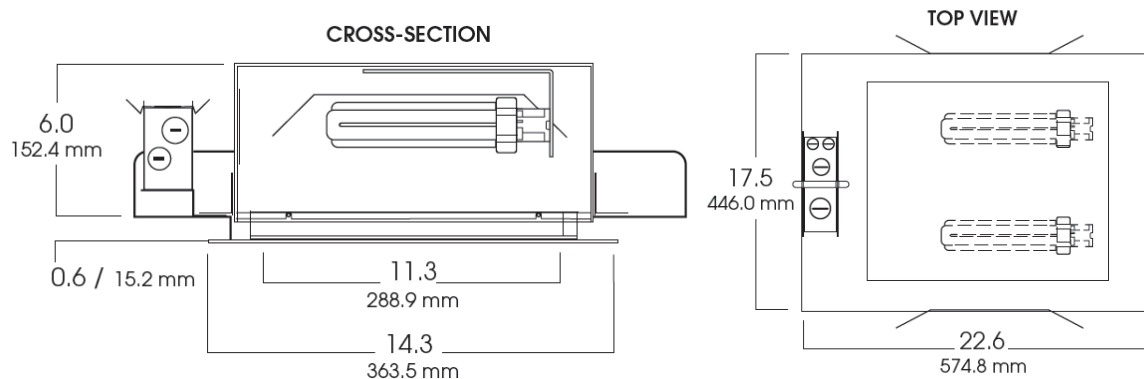

*For critical application verify all dimensions with factory.  
For additional Lamp/Ballast options, consult factory.*