



# X6R

JOB NAME:

FIXTURE TYPE:

## ALL PURPOSE EXIT LIGHT

### FEATURES

- Slim, easy to install unit can accommodate a variety of lamp combinations. Incandescent units provided with 2 long life 20T6½ lamps. Fluorescent units provided compact PL lamps. L.E.D. units provided with ultra bright L.E.D. diodes.
- Reliable and cost efficient unit is ideal for any commercial or industrial application where high performance and contemporary design is required.
- Universal mounting single or double face for ceiling end or back mount. Includes canopy and extra fiber stencil set.
- Baked white enamel stencil face with 6" red translucent letters is standard.
- To meet various local codes, units are also available with optional green letters, 8" letters instead of 6" letters, or flashers, when specified.
- Knockouts provided for left, right, and double face arrows.
- Emergency models provided with solid state charging system and maintenance free batteries.
- DC emergency sockets are optional for connection to remote battery unit.

### SPECIFICATIONS

- **HOUSING**  
Die formed 20 gauge cold rolled steel for superior strength and durability with standard downlight aperture. Optional cast aluminum and thermo plastic housings.
- **ELECTRICAL**  
Preheat with starter PL Core and Coil, Normal Power Factor.
- **FINISH**  
Housing pre-painted with high gloss baked white enamel over iron phosphate pretreatment for maximum adhesion and rust resistance. Baked black enamel optional.
- **CERTIFICATION**  
All units bear UL label and Made in the U.S.A. label. Meets or exceed NEC, OSHA, NFPA, and most state and local codes.

New York City and Chicago approved units available.




# All Purpose Exit Light

Ordering Matrix

CATALOG NUMBER	LAMPS	TYPE	HOUSING
X6R	2-20T6½	Incandescent	Steel
X6R-2PL7	2-PL7	Compact Fluorescent	Steel
X6R-LED	LED	Light Emitting Diode	Steel
X6R-LED-PP	LED	LED with Ni-Cad Battery	Steel
CA-X6R	2-20T6½	Incandescent	Cast Aluminum
CA-X6R-2PL7	2-PL7	Compact Fluorescent	Cast Aluminum
CA-X6R-LED	LED	Light Emitting Diode	Cast Aluminum
CA-X6R-LED-PP	LED	LED with Ni-Cad Battery	Cast Aluminum
LE-X6R	2-20T6½	Incandescent	Thermoplastic
LE-X6R-2PL7	2-PL7	Compact Fluorescent	Thermoplastic
LE-X6R-LED	LED	Light Emitting Diode	Thermoplastic
LE-X6R-LED-PP	LED	LED with Ni-Cad Battery	Thermoplastic

**Options:**

- 277V – suffix 277V
- Cast Aluminum Housing – prefix CA
- Polycarbonate Housing – prefix LE
- Emergency Battery Pack – suffix PP
- DC Emergency Sockets – EC (specify voltage)
- Green Stencil Face – change X6R to X6G
- 8" Letters – change X6R to X8R
- Emergency Heads – suffix 2H

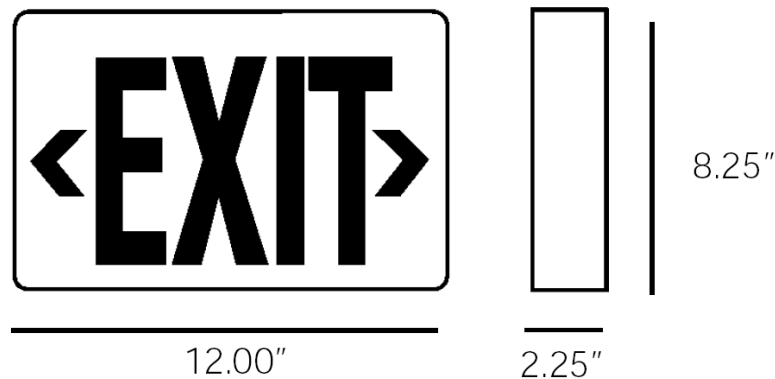

*For critical applications, verify all dimensions with factory.*